
Ed.	Position	Gewijzigd van / Modified from	Datum / Date	Ingev./Goedg. / Intr./Appd.
00			2005-10-11	AIR13917

2901 1580 00

SHAFT SEAL KIT GX15-22/GA11-22 BELT DRIVEN

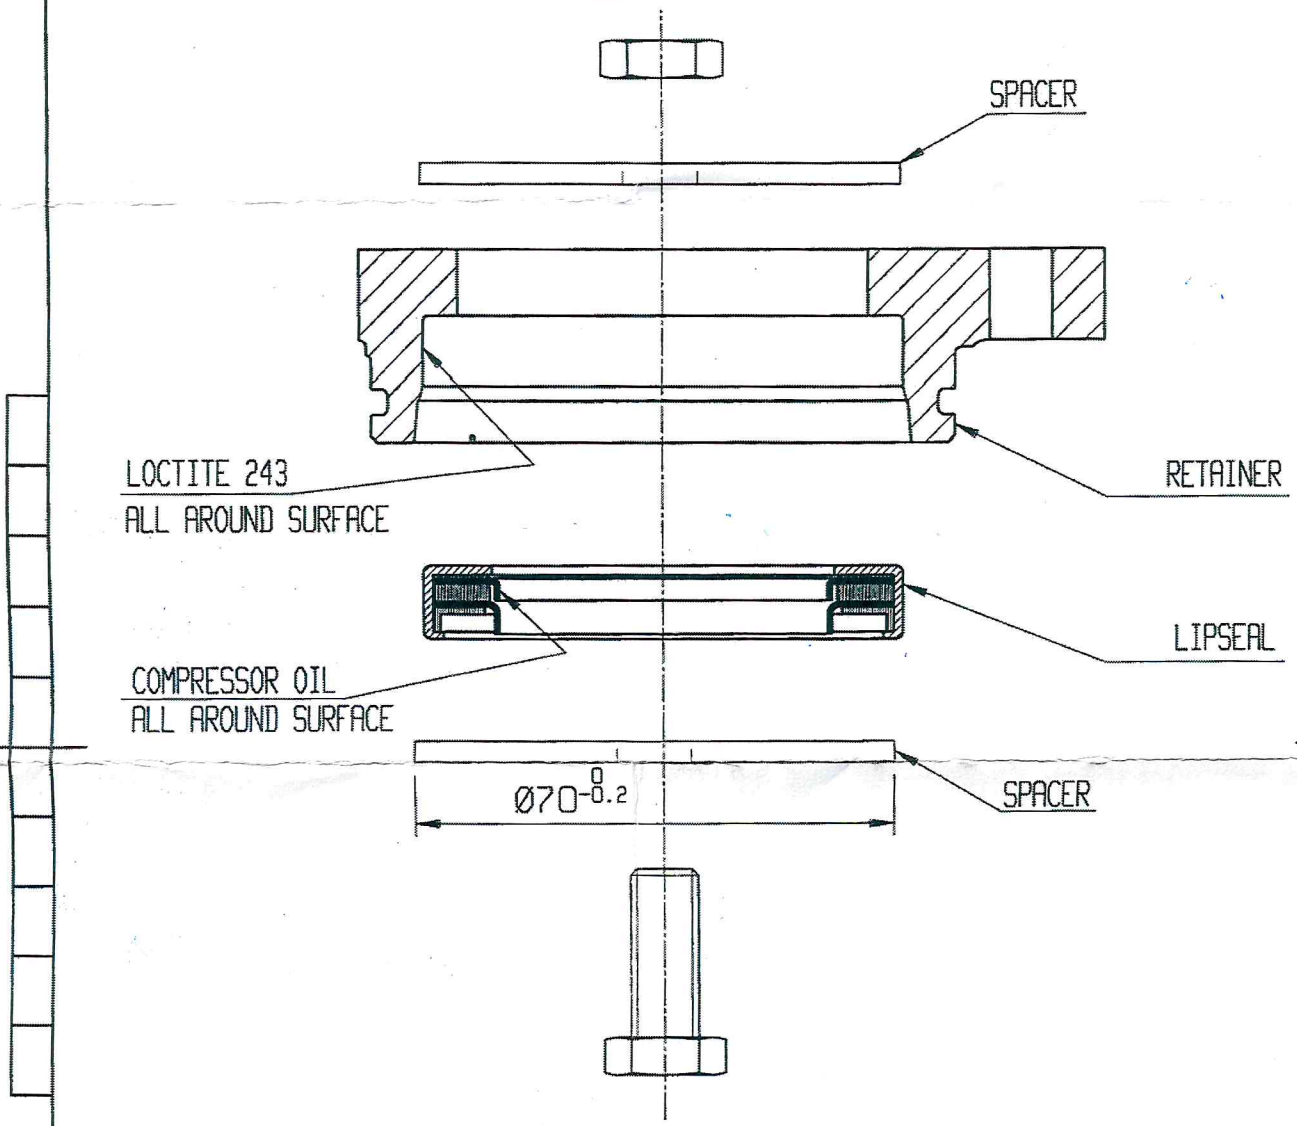

*BOLT AND SPACERS ARE NOT INCLUDED IN KIT.
*BOLT AND SPACERS ARE USED TO PULL IN THE SHAFT SEAL.
*PUT LOCTITE 641 TO THE ELEMENT SHAFT(AT BUSHING POSITION)
*BUSHING PREHEATED UP TO 130°C

Tolerantie, indien niet aangegeven, zijn volgens: / Tolerances, if not indicated, according to:	Bew. opp./Gaten Mach. surf./Holes	Plaatwerk Sheet metal	Snijbranden Flame cutting	Lassen Welding
ATLAS COPCO STANDARD/Klasse/Class	1350K / 2	1350:01K	1355K / C	1356K / B

Benaming / Name	INSTRUCT DRWG SHAFTSEAL KIT GX15-22/GA11-22B	Geheimh.klasse / Secrecy Class	
Materiaal / Material	NOT APPLICABLE	1102 K/ 2	
Behandeling / Treatment	Not Applicable	CAD	

Atlas Copco	Schaal / Scale 1:1	Familie / Family	A4	Vergelijk / Compare	Eigenaar / Drawing owner AII
	Getekend / Drawn by AIR13006	Ruw nr. / Blank nr.		Vervangt / Replaces	
Overgenaakt/Transferred from	Std gez./chd.	Ruw gew. / Blank wt. 0 Kg		Afg gew. / Fini wt. 0 Kg	Identificatie/Designation 2904 0006 00
	Des gez./chd.	Prod gez/chd.	Goedg./Appd.	Datum/Date 2005-10-07	Blad/Sheet 01 (01)

Approved

Dit dokument is onze eigendom en zal niet zonder toestemming worden gewijzigd, gecopieerd, gebruikt voor fabricatie of mededeling aan enig ander persoon of firma.
This document is our property and shall not without our permission be altered, copied, used for manufacturing or communicated to any other person or company