PT-306-16 Pressure transmitter

Product Overview:

The PT-306 pressure transmitter adopts an imported sensor core, stainless steel isolation small structure, small shape, and convenient installation. It has a wide range of range and a variety of output signals. The product has good stability in a wide range of temperatures and is widely used in refrigeration, air-conditioning equipment and air compressors. CE certification can directly replace a variety of similar imported products, such as Atlas, MSI, HUBA.




Main features:

Adopt advanced sensor core, high cost performance; Multiple pressure ranges and electrical outputs; Small structure, low cost; Good electrical performance; Excellent waterproof hammer design; Long-term stability is good.

Technical parameters:

Range: 0-16bar Integrated Precision: ± 0.5 % FS
Output signal: 4 ~ 20mA
pressure: 2 * FSO
Operating temperature: -40 °C ~ 125 °C(104 °F ~ 257 °F)
Temperature drift: ± 0.02 % / °C
Power supply voltage: 24 VDC electrical connection: direct lead
Process connection: G1/4

Shape Size :

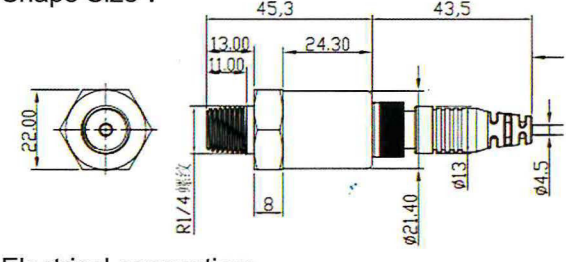

Electrical connection:

4-20mA

Red	V+
Black	V- (out)